

Hammer-In Fixings

Yellow



POZI




DRYWALL




Rapid light duty plasterboard fixing with zinc plating & yellow passivated, to enhance corrosion resistance.



TECHNICAL DATA	
Substrate	Plasterboard 12.5mm Thickness
Screw Size (mm)	4.0 x 30
Metal Plug Size (mm)	11 x 30
Max. Fixture Thickness (mm)	6.0
Rec. Tensile Load (kN)	0.15
Max Rec. Load (kg)	15




Hammer the metal plug into plasterboard



Tighten fixture until secure

Product Code	Screw Ø x L (mm)	Metal Plug Size (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX					
HPF30	4.0 x 30	11.0 x 30	100	18	648
TYPE - ANP				SUB TYPE - ANP03	
TIMPAC					
HPF30P	4.0 x 30	11.0 x 30	100	5	-
TYPE - PAK				SUB TYPE - PAK38	

Plastic Plugs

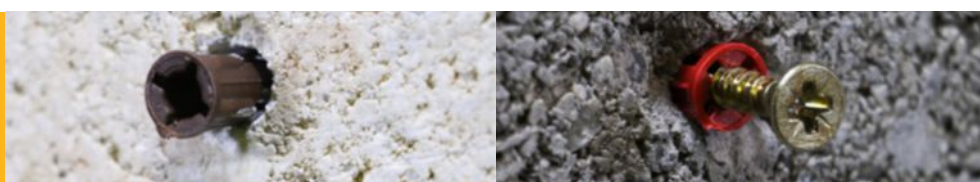

Premium Plastic Plugs



BLOCK CONCRETE BRICK

Premium plugs with improved pull-out loads and anti-rotation fins compared to standard plugs. Loose and off the sprig for quicker and more convenient installation on site.



TECHNICAL DATA		
Substrate	C20/25 Concrete	
Colour	Red	Brown
Plug Length (mm)	34	42
Drill Hole Ø (mm)*	5.5	7.0
To Fit Screw Ø (mm)	3.5 - 4.8	4.5 - 6.0
To Fit Screw Ø (Imp.)	6 - 10	8 - 12
Rec. Tensile Load (kN)	0.18	0.5
Max Rec. Load (kg)	18	50
Tested using screw Ø (mm)	4.0	5.0

* It may be beneficial to reduce drill diameter in soft materials.

Product Code	Colour	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BAG				
RPLUGPREM	Red	1000	30	900
BPLUGPREM	Brown	1000	15	600
TUB				
RPLUGPREMT	Red	850	20	-
BPLUGPREMT	Brown	600	20	-

TYPE - PLU SUB TYPE - PLU01

Plastic Plugs



Suitable for all kinds of concrete and masonry substrate materials. Ideal for medium and lightweight applications. It may be beneficial to reduce drill diameter in soft materials.

TECHNICAL DATA				
Colour	Yellow	Red	Brown	Blue
Plug Length (mm)	25	30	36	48
Drill Hole Ø (mm)*	5.0	5.5	7.0	10.0
Min. Drill Hole Depth (mm)	30	35	45	55
To Fit Screw Ø (mm)	3.0 - 4.5	3.5 - 5.0	4.0 - 6.0	6.0 - 8.0
To Fit Screw Ø (Imp.)	4 - 8	6 - 10	8 - 12	12 - 15


* It may be beneficial to reduce drill diameter in soft materials.

Boxes - Yellow, Red and Brown sold in multiples of 1000.
Blue plug sold in multiples of 400.

Product Code	Colour	Sprig Qty	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
BOX (SPRIGS)					
YPLUG	Yellow	20	100	100	1200
RPLUG	Red	20	100	100	800
BPLUG	Brown	10	100	100	500
BLPLUG	Blue	10	40	100	500
TIMBAG (LOOSE)					
RPLUGB	Red	N/A	450	5	600
BPLUGB	Brown	N/A	300	5	600
TIMPAC (LOOSE)					
YPLUGP	Yellow	N/A	50	10	-
RPLUGP	Red	N/A	30	10	-
BPLUGP	Brown	N/A	20	10	-
BLPLUGP	Blue	N/A	10	10	-

TYPE - PAK SUB TYPE - PK003

Plastic Plugs with Screws



BLOCK CONCRETE BRICK

Suitable for all kinds of concrete and masonry substrate materials. Ideal for medium and lightweight applications.

TECHNICAL DATA		
Colour	Red	Brown
Plug Length (mm)	30	36
Drill Hole Ø (mm)*	5.5	7.0
Min. Drill Hole Depth (mm)	35	45
To Fit Screw Ø (mm)	3.5 - 5.0	4.0 - 6.0
To Fit Screw Ø (Imp.)	6 - 10	8 - 12

* It may be beneficial to reduce drill diameter in soft materials.

Product Code	Colour	Screw Size (mm)	Pack Qty (pcs)	Carton Qty (packs)	Pallet Qty (packs)
TIMBAG					
SRPLUGB	Red	4.0 x 40	400	5	600
SBPLUGB	Brown	5.0 x 50	250	5	600
TYPE - BAG				SUB TYPE - BAG4	
TIMPAC					
SRPLUGP	Red	4.0 x 40	50	10	-
SBPLUGP	Brown	5.0 x 50	30	10	-
TYPE - PK				SUB TYPE - PK010	